

# DTV-VLD

VANDAL RESISTANT HIGH RES DAY/NIGHT VARI FOCAL EXTERNAL DOME

Image Sensor  
Resolution  
Sensitivity (LUX)

Electronic Shutter  
Lens  
BLC  
Mounting  
Features

Enclosure Rating  
Power requirements  
Dimensions (mm) (WxH)

1/3" Sony Super HAD CCD  
540 TVL  
0.3 Lux @ F1.2 Colour  
0.002 Lux (Sens Up)  
1/50 - 1/120,000  
2.8-11mm Direct Drive  
Low/Middle/High/Off selectable  
Wall or Ceiling  
OSD, Motion Detection, Privacy Function  
DNR (Digital Noise Reduction)  
IP66  
12V DC, 210 mA  
150 x 135



Standard camera



High end colour/mono




VLD dome

**The above images were taken at midnight with the light measurement of 0.03 Lux**

The bushes to the top right of the scene could hardly be seen with the naked eye

**On screen display enables access to the following features**

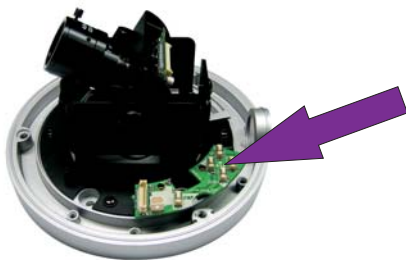

Sens-Up (10 levels)  
Adjustable back light compensation  
Adjustable white balance  
Digital Noise Reduction for noise reduction and disk saving  
Privacy Masking - 4 programmable zones  
Mirror function - horizontal image inversion  
Motion Detection  
Automatic Gain Control  
Camera ID  
Sharpness control



**Cable managed wall bracket also available**